

MÖ Omni

Customised Omni-Marketing Channel Remotely Controlled for You

55" or 43" Centralised Control Hanging Double-Sided Window Display



Double Sided Window Display

Grab the attention of onlookers with the outward facing, sunlight readable Omni screen. Once your clients are inside the clinic you can then use the inward facing display to reinforce your message further.

Centralised Control

Branding content is uploaded onto to the screen remotely by Scandinavian Skincare Systems. This ensures that you are continually up-to-date with the latest marketing messages without having to create anything yourself. Images and videos are updated periodically and play in a continuous loop.




2 Sides



450 cd/m²

700 cd/m²

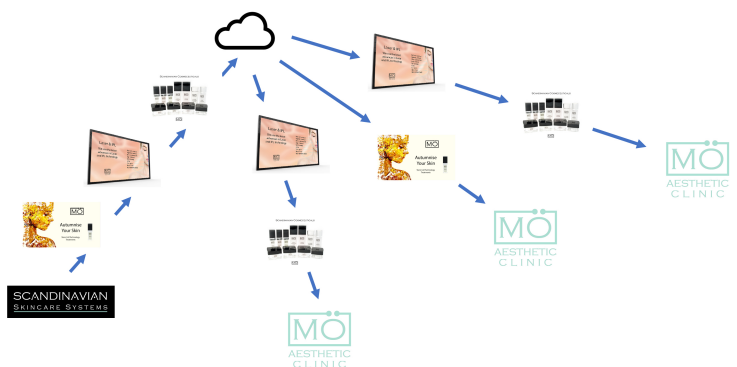

Ultra Resistant Blackening Defect (up to 110°C)

LCD panels exposed to direct sunlight suffer from temporary blackening defect. These displays use a special high brightness panel that can withstand surface temperatures up to 110°C with no blackening defect occurring.

Window Displays (700cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (700cd/m²); more than twice the brightness of a standard home TV to allow easy readability in window displays.

Other Features

24/7 Commercial Grade


These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours; a true commercial grade solution.

700cd/m² & 450cd/m² IPS Panel

The outward facing screen uses a high brightness panel for grabbing the attention of passers-by while the inward facing screen uses a lower brightness panel for easy indoor readability.

Super Slim Design

Even though these displays feature two separate screens they have a profile thinner than most single-sided displays. They have a remarkable depth of just 23mm, allowing for stylish and modern window displays.

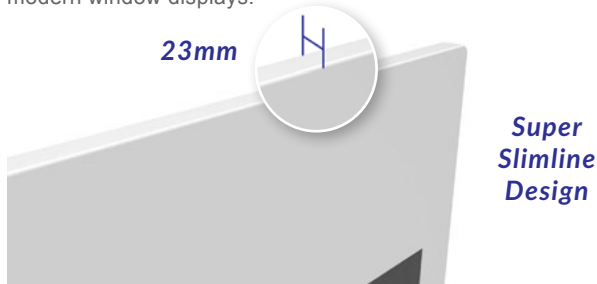

Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in portrait orientation.

Integrated Ceiling Mount

The screen comes with an integrated wire hanging mounting solution so no additional ceiling mount is required. You can even hide unsightly power and data cables in the cover tubes provided.

Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.

Integrated Marketing

All marketing campaigns are created circa 3-months in advance and can be cross-linked to your website and social media. Your clinic Instagram and Facebook page can be viewable via the Omni screen.



The MÖ Omni Channel - Customised to Your Clinic

The MÖ Omni Channel has been developed by Scandinavian Skincare Systems to be specifically customised to your clinic operation. All content is centrally produced and uploaded by our head office to ensure that the display at your clinic reflects the MÖ equipment and products in use and specifically the treatments that your aestheticians are equipped to do.

The Omni system will present ongoing branding reinforcement for special seasons; new treatments; cosmeceuticals products; our upcoming philanthropic causes; and other news that will help to promote your clinic operation. There will be no surprises as details of all content will be provided to you circa 2-months in advance. If there is anything that you wish to exclude from the ongoing campaign, you simply need to let us know.

The advantage to you is continuous up-to-date marketing and promotion with regular campaigns that can be integrated into your overall marketing plans. Images and video displayed are also available via our Omni Channel portal in resolution formats suitable for your social media and your website to project a uniform approach to your clients.

The MÖ Omni Channel is available to clients who can deliver an extensive and wide reaching array of MÖ aesthetic treatments and cosmeceuticals products.

Wall-Mounted Flatscreen Omni Channel Options

The MÖ Omni Channel is also available via a selection of wall-mounted flat screen options in 22" | 32" | 43" | 50" | 55" and which can be used in portrait or landscape formats. These premium displays combine stunning tablet-like aesthetics with a robust protective enclosure and a tempered glass face.



Free Flush-Fit Wall Mount

A super slim wall mount is included at no extra cost, enabling you to install your screen in either landscape or portrait orientation with a secure and aesthetically-pleasing flush fit to the wall.



24/7 Commercial Grade

Designed for continuous use in public spaces, these displays utilise commercial grade LCD panels, LED backlights and internal components. This means they can run 24/7 for over 70,000 hours. To avoid tampering, they also have no external buttons or controls.

450cd/m² IPS Panel


Commercial grade IPS technology ensures incredible image quality and colour depth with no fall-off in colour accuracy, as well as achieving ultimate lifelike colour from an ultra-wide viewing angle in landscape or portrait orientation.

Lightweight Design

By using less and lighter materials, component weight is kept to a minimum. This compact design makes both installation and maintenance much more convenient.

Aluminium Surround


Thanks to their stunning surround, which is made of diamond-cut 6-series aluminium alloy and has a premium brushed finish, as well as their unique concave indent profile, these displays are truly distinguishable. Sculpting the surround from a single piece, rather than in segments, achieves a cleaner finish.

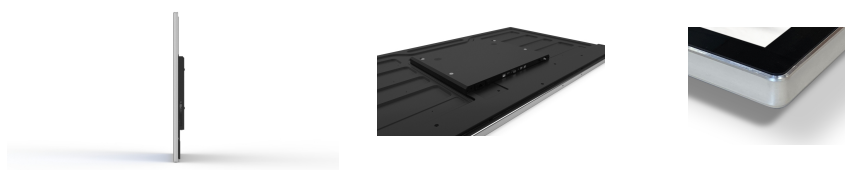

Specification Table - MÖ Omni Channel 55" Centralised Control Hanging Double-Sided Window Display

		55 Inch
Panel	Resolution	1920x1080
	Display Areas (mm)	1209.6x680.4
	Aspect Ratio	16:9
	Side A Brightness (cd/m ²)	700
	Side B Brightness (cd/m ²)	450
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1200:1
Audio	Speaker Type	2W, 8Ω (x2)
AV Inputs	Video	HDMI, VGA
	Audio	Audio Socket (3.5mm)
Power	Power Consumption (W)	220
	Input Voltage	AC100~230V (50Hz~60Hz)
Mechanical	Unit Size (WxHxD mm)	1574x823x23
	Package Size (WxHxD mm)	1870x1080x240
	Net Weight (kg)	38
	Gross Weight (kg)	48
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	0% to 90%
	Storage Humidity	0% to 95%
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	Internal Memory	6GB
	CPU	Quad-Core Cortex-A17@1.61GHz
	GPU	Mali-T760 MP4 @600MHz
	RAM	2GB DDR3
	ROM	8GB NAND
	USB	USB2.0 HOST (x2)
	LAN	10/100M Ethernet (Network Version Only)
	Wi-Fi	802.11b/g/n/ac (Network Version Only)
	OS	Android 5.1.1
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
	Accessories	Included
Optional		Network Upgrade, Touch Screen Version
Warranty	Warranty Period	3 Year Warranty
	Uploads and Technical Support	Available subject to offering MÖ products and treatments


Technical Drawing - MÖ Omni Channel 55" Centralised Control Hanging Double-Sided Window Display

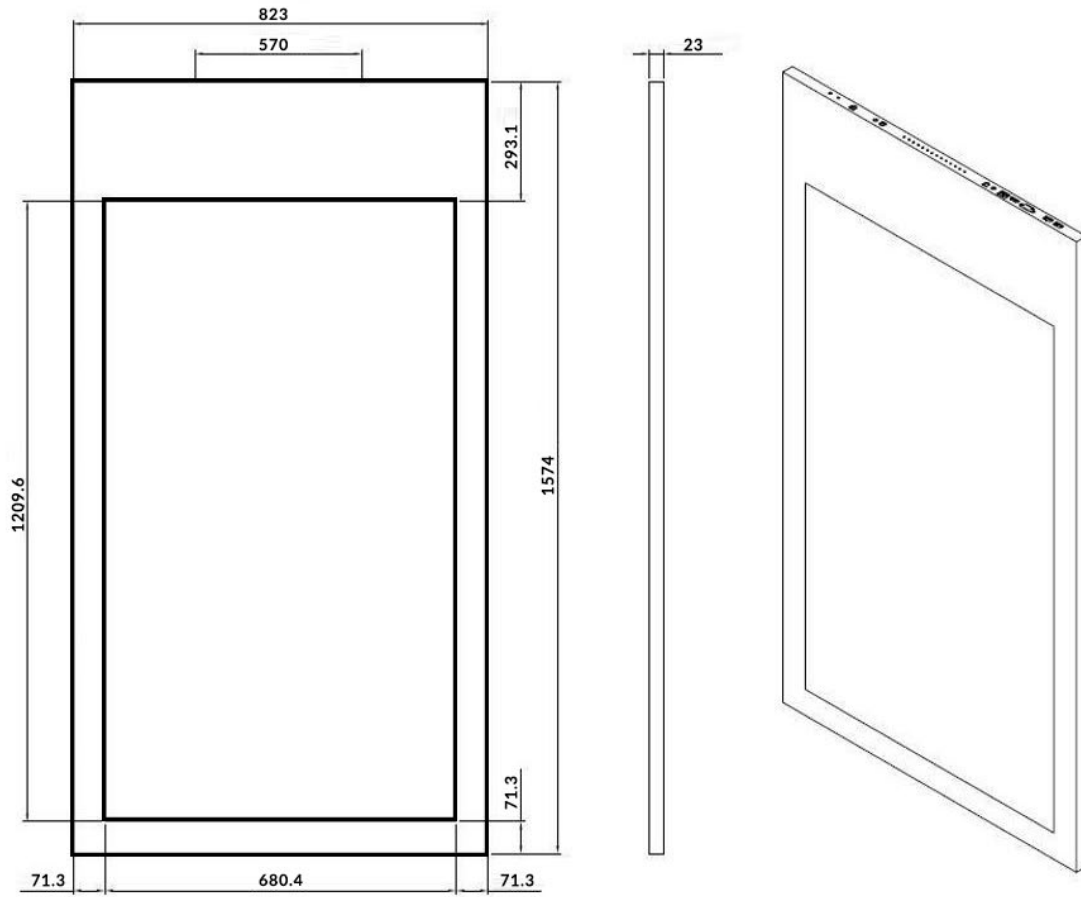

Specification Table - MÖ Omni Channel 43" Centralised Control Hanging Double-Sided Window Display

		43 Inch
Panel	Resolution	1920x1080
	Display Areas (mm)	943x536
	Aspect Ratio	16:9
	Side A Brightness (cd/m ²)	700
	Side B Brightness (cd/m ²)	450
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1200:1
Audio	Speaker Type	2W, 8Ω (x2)
AV Inputs	Video	HDMI, VGA
	Audio	Audio Socket (3.5mm)
Power	Power Consumption (W)	150
	Input Voltage	AC100~230V (50Hz~60Hz)
Mechanical	Unit Size (WxHxD mm)	1178x635x23
	Package Size (WxHxD mm)	1238x695x81
	Net Weight (kg)	18
	Gross Weight (kg)	22
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	0% to 90%
	Storage Humidity	0% to 95%
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	Internal Memory	6GB
	CPU	Quad-Core Cortex-A17@1.61GHz
	GPU	Mali-T760 MP4 @600MHz
	RAM	2GB DDR3
	ROM	8GB NAND
	USB	USB2.0 HOST (x2)
	LAN	10/100M Ethernet (Network Version Only)
	Wi-Fi	802.11b/g/n/ac (Network Version Only)
	OS	Android 5.1.1
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
	Accessories	Included
Optional		Network Upgrade, Touch Screen Version
Warranty	Warranty Period	3 Year Warranty
	Uploads and Technical Support	Available subject to offering MÖ products and treatments

Technical Drawing - MÖ Omni Channel 43" Centralised Control Hanging Double-Sided Window Display

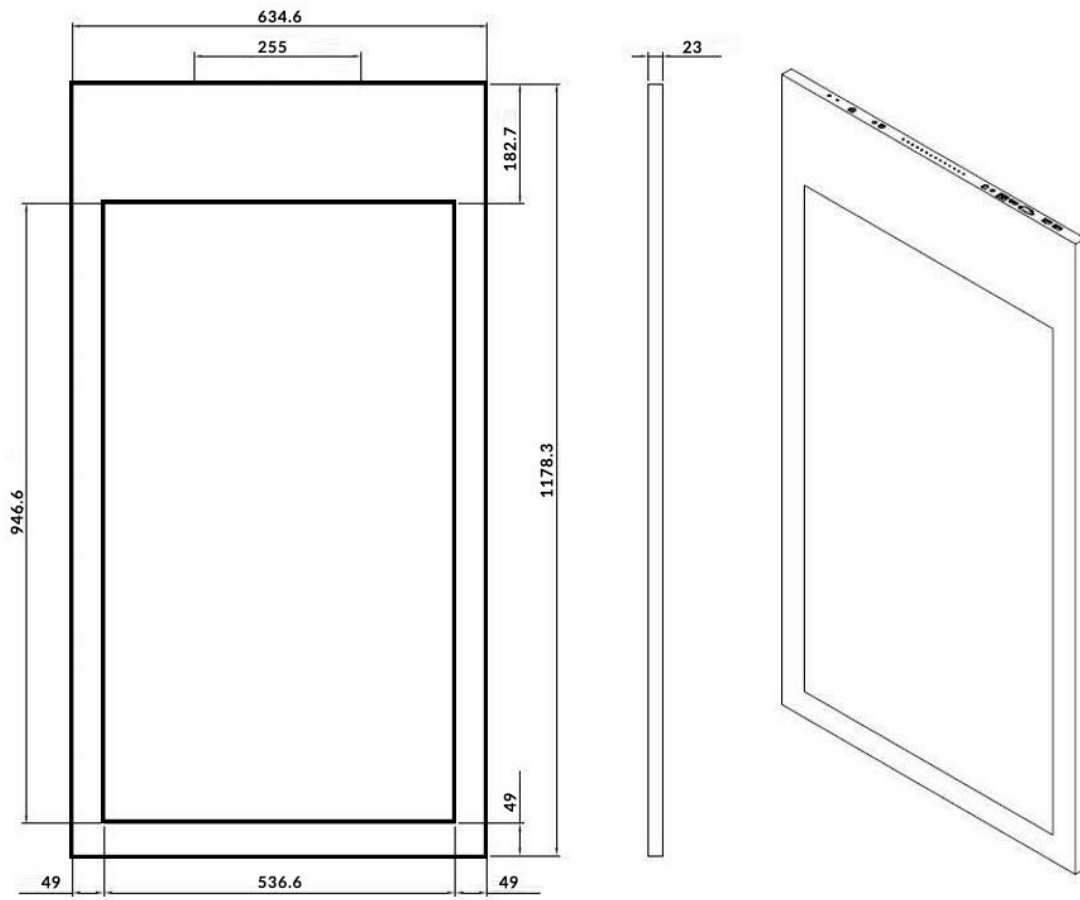

Specification Table - Wall-Mounted Flatscreen Omni Channel Options

		22 Inch	32 Inch	43 Inch	50 Inch	55 Inch
Panel	Resolution	1920x1080				
	Display Area (mm)	475x266.4	697.4x391.9	941.2x529.4	1072.8x603	1209.6x680.4
	Aspect Ratio	16:9				
	Brightness (cd/m ²)	450				
	Colour	16.7M				
	Viewing Angle	178°				
	Contrast Ratio	5000:1				
Audio	Speaker Type	2x2W 4Ω				
AV Inputs	Video	HDMI, VGA				
	Audio	Audio Socket (3.5mm)				
Power	Power Consumption (W)	20	50	45	70	121
	Input Voltage	AC110~240V (50Hz~60Hz)				
Mechanical	Unit Size (WxHxD mm)	529.6x321x42.3	757.8x452.3x49.3	997.6x585.8x50.6	1135.2x665.4x63.2	1275x745.8x54.8
	Package Size (WxHxD mm)	675x424.5x118.5	870x563x165	1095x688x170	1279.2x818x199	1417x864.5x193
	VESA Holes (mm)	400x200	400x200	400x200	400x400/400x200	400x200
	Net Weight (kg)	6.1	11.15	16.75	27.1	29.4
	Gross Weight (kg)	8.1	13.85	20.35	32.79	36.9
Environmental	Operating Temperature	0 °C to 50 °C				
	Storage Temperature	-30°C to 60°C				
	Operating Humidity	10% to 80%				
	Storage Humidity	5% to 95%				
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)				
	Media Resolution	1920x1080/1080x1920				
	CPU	Quad-Core ARM Cortex A17, 1.6GHz				
	GPU	Quad-Core ARM Mali-T764				
	RAM	DDR3 2GB				
	Internal Storage	8GB eMMC				
	USB	1 x USB (OTG/HOST), 1 x USB (HOST)				
	LAN	100M/1000M Ethernet (Network Version Only)				
	Wi-Fi	802.11b/g/n/ac (Network Version Only)				
	Bluetooth	Bluetooth 4.0				
	OS	Android 7.1				
Accessories	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1				
	Included	Special Wall Mount, Scheduling Software, Remote Control, Key, User Manual				
	Optional	Network Upgrade, Touch Screen Version, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand				
Warranty	Warranty Period	3 Year Warranty				
	Uploads and Technical Support	Available subject to offering MÖ products and treatments				

Scan Skin Sys Ltd
Scandinavian Skincare Systems Group of Companies
58 High Street
Broadway
Worcestershire
WR12 7DT
England
+44 (0) 7711 086227
info@scandinavianskincare.com
www.scandinavianskincare.com

SCANDINAVIAN
SKINCARE SYSTEMS